




PERNOS DE CABEZA HEXAGONAL (HEX CAP SCREWS)

SAE GRADO 5
ANSI/ASME B18.2.1 1981

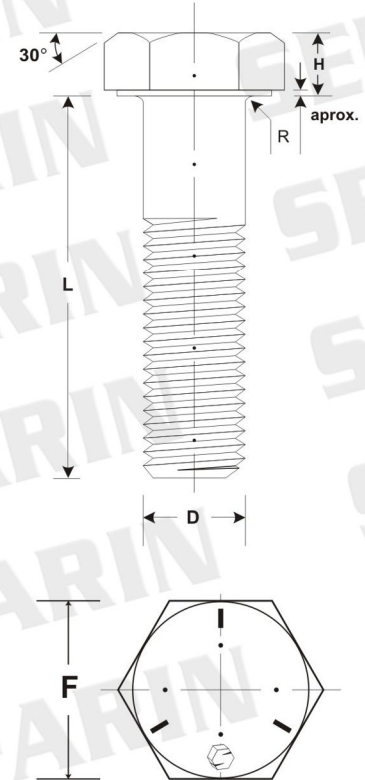

D Diámetro		Hilos por pulg.		F Distancia entre caras	H Altura de la cabeza
		R.O.	R.F.		
1/4	.250	20	28	7/16	5/32
5/16	.312	18	24	1/2	13/64
3/8	.375	16	24	9/16	15/64
7/16	.437	14	20	5/8	9/32
1/2	.500	13	20	3/4	5/16
9/16	.562	12	18	13/16	23/64
5/8	.625	11	18	15/16	25/64
3/4	.750	10	16	1-1/8	15/32
7/8	.875	9	14	1-5/16	35/64
1	1.000	8	14	1-1/2	39/64
1-1/4	1.250	7	12	1-7/8	25/32

Longitudes: L = 1/2" hasta 10"

Clase de Rosca: Ordinaria (UNC) y fina (UNF) 2A

Longitud de rosca mínima: Dos veces el diámetro del Perno mas 1/4" para longitudes menores o iguales a 6" y para longitudes mayores a 6", dos veces el diámetro mas 1/2". (Ver tabla de especificaciones N° 8).